

MONTAGGIO



1 - Forare polistirolo e muro



2 - Inserire tassello fino in fondo





3 - Inserire spinotto nel tassello



4 - Battere sullo spinotto per ottenere l'espansione



BENESTARE TECNICO EUROPEO ETA 12/0334

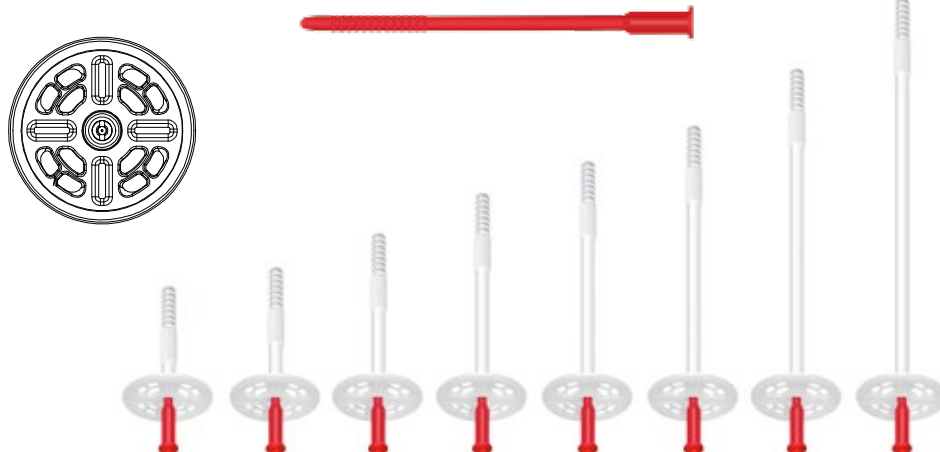

TASSELLO OMOLOGATO PER LE SEGUENTI CLASSI DI MATERIALI DA COSTRUZIONE



CAT. A
CALCESTRUZZO



CAT. B
MATTONE PIENO



CAT. C
MATTONE FORATO

SCHEDA ORDINE PRODOTTO / PRODUCT ORDER DATA SHEET

COD.	MOD.					
TA06-01	60mm	○	250	32000	100x120x225	0,006 kg/pz
TA07-01	70mm	○	250	27000	100x120x240	0,007 kg/pz
TA09-01	90mm	○	250	27000	100x120x240	0,008 kg/pz
TA11-01	110mm	○	250	24000	100x120x245	0,009 kg/pz
TA13-01	130mm	○	250	24000	100x120x245	0,010 kg/pz
TA15-01	150mm	○	250	15000	100x120x245	0,012 kg/pz
TA18-01	180mm	○	250	15000	100x120x245	0,014 kg/pz
TA21-01	220mm	○	250	10500	100x120x220	0,016 kg/pz

*MEASURES IN CENTIMETERS

SCHEDA TECNICA PRODOTTO / TECHNICAL SHEET

MOD.	A*	D*	D1*	ØForo*	Profondità annegamento*
60mm	60	58	6	10	50
70mm	70	58	6	10	50
90mm	90	58	6	10	50
110mm	110	58	6	10	50
130mm	130	58	6	10	50
150mm	150	58	6	10	50
180mm	180	58	6	10	50
220mm	220	58	6	10	50

*MEASURES IN MILLIMETER

N.B. I pesi indicati possono essere soggetti a variazione del +/- 10%

The weights are subject to change of +/- 10%



CHEVILLE À EXPANSION



TACO ESPANCION



TASSELLO ESPANSIONE

Prodotto da Vitrex, è la soluzione ottimale per un fissaggio a secco veloce ed economico dei pannelli in EPS su calcestruzzo, mattone pieno e mattone forato.

Materiale:

- Tassello in PE-HD ad alto modulo.
- Chiodo 60mm e 70mm in PE-HD ad alto modulo.
- Chiodo da 90mm a 220mm in Nylon (come da Normativa vigente).



WALL INSULATION ANCHOR

Manufactured by Vitrex, it's the optimal solution for dry fixing fast and cheap of EPS panels on concrete, full brick and perforated one.

Material:

- HDPE fixing anchor with high modulus.
- HDPE nail 60mm and 70mm with high modulus.
- Nylon nail from 150mm to 220mm (as per current standards).

